



1 ELEVATION - GFRCL WALL PANELS
 SCALE: 1/2" = 1'-0"
 REF.

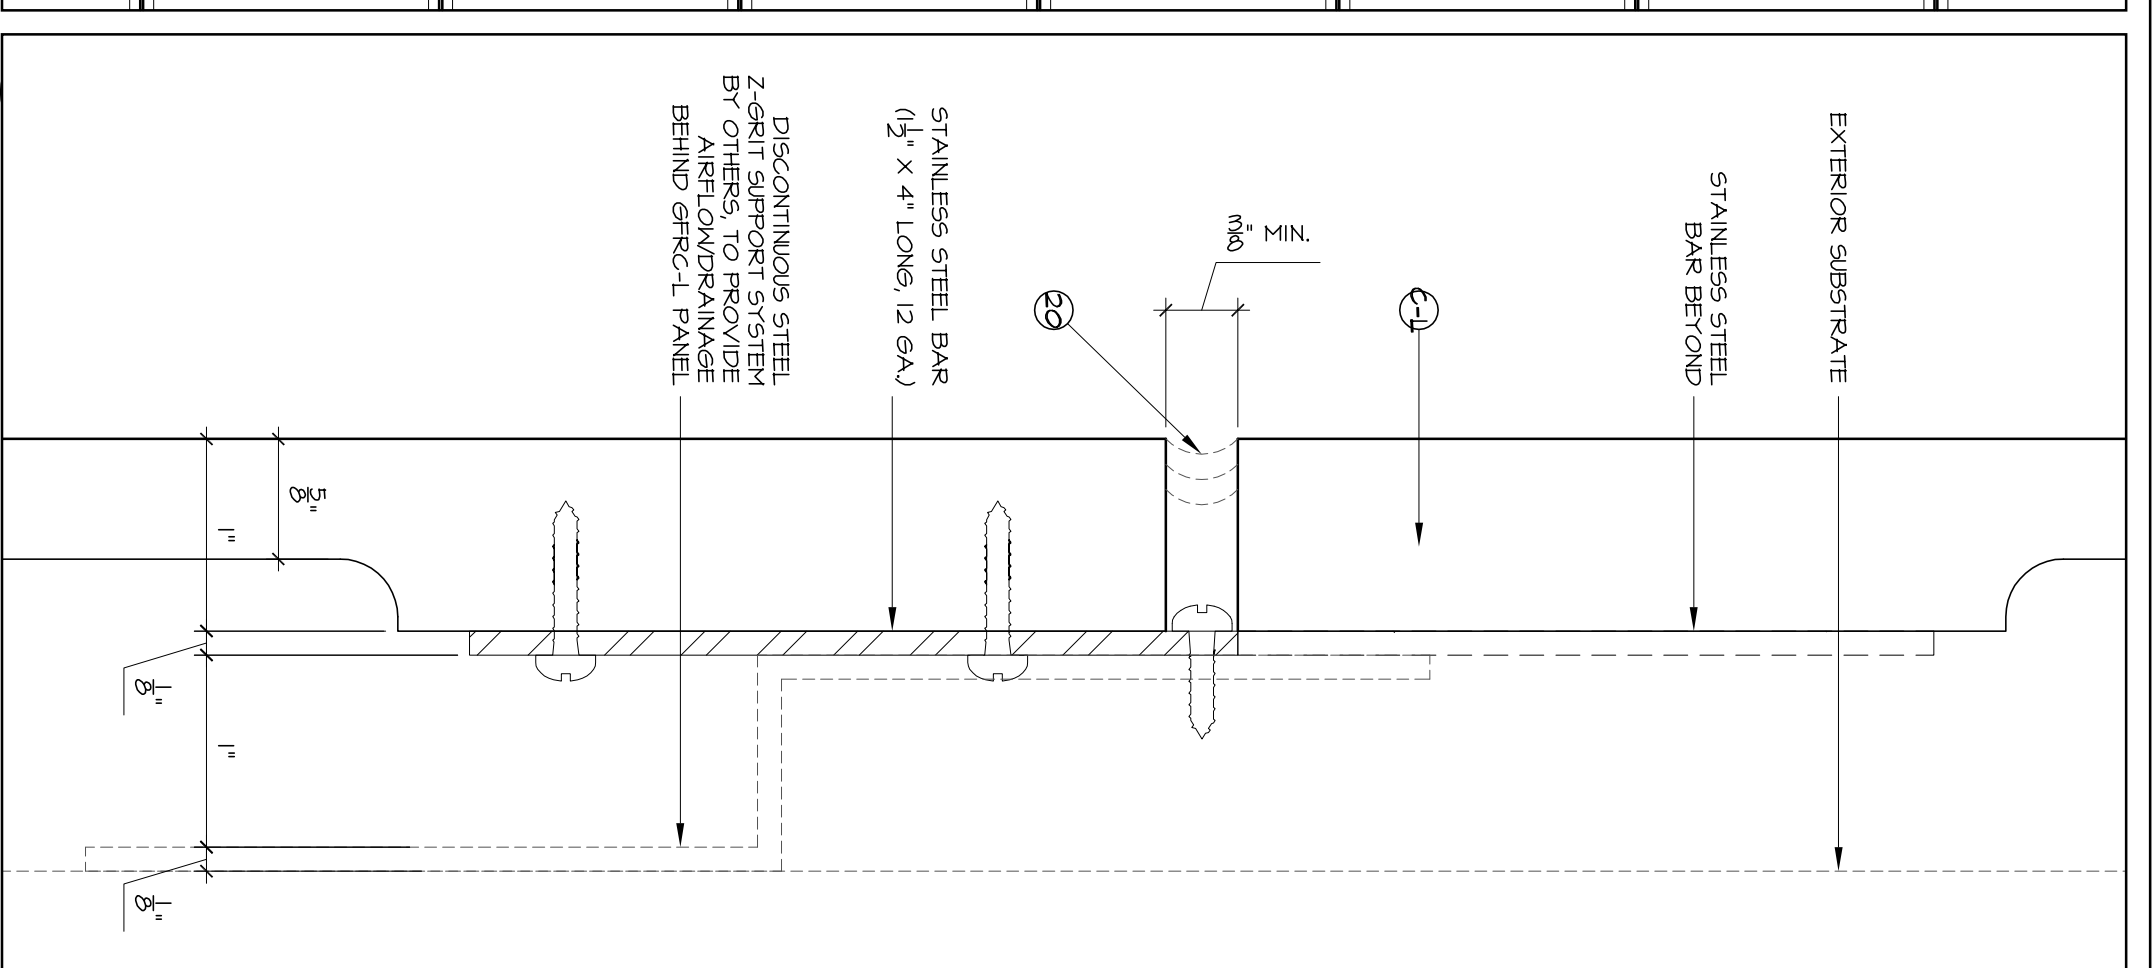


3 SECTION DETAIL (EXTERIOR)
 SCALE: HALF SCALE
 REF.

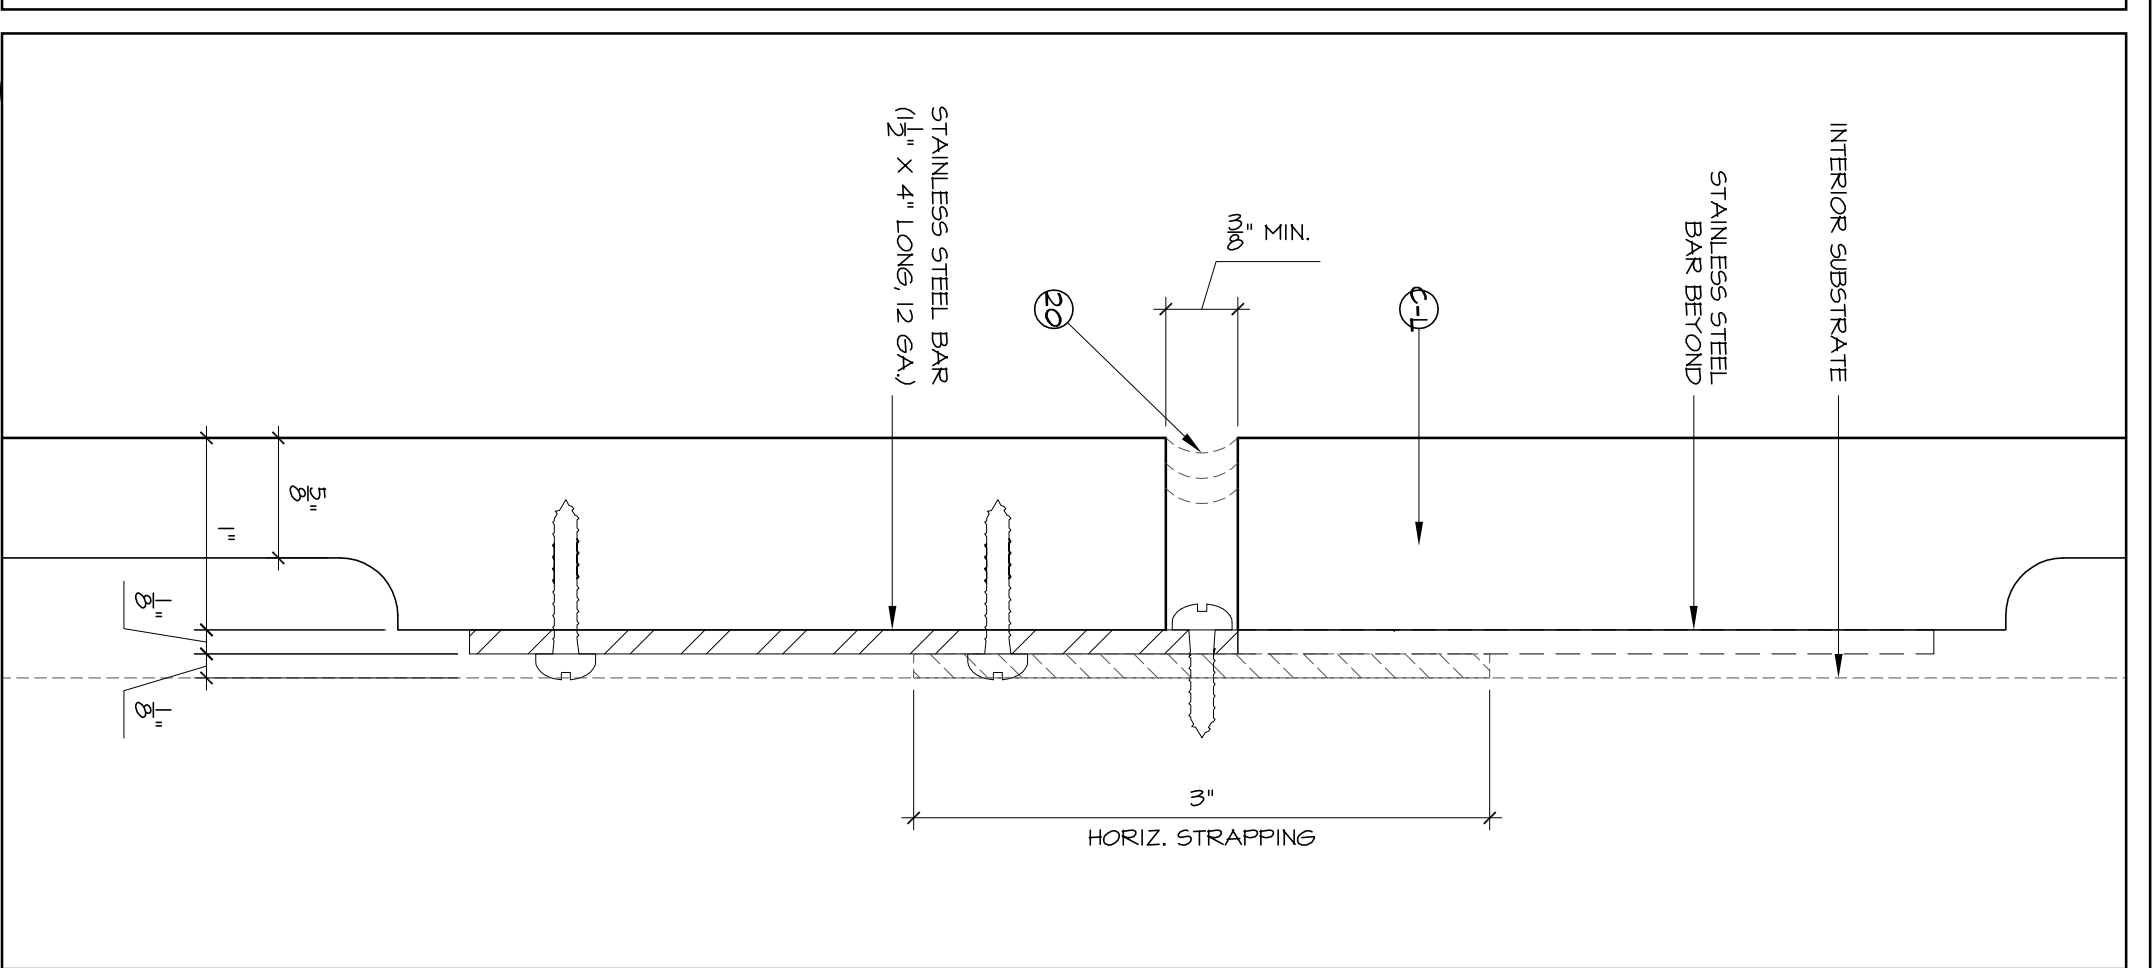


5 SECTION DETAIL (INTERIOR)
 SCALE: HALF SCALE
 REF.

NOTE: MAX PANEL SIZE IS 3'-0" X 4'-0"

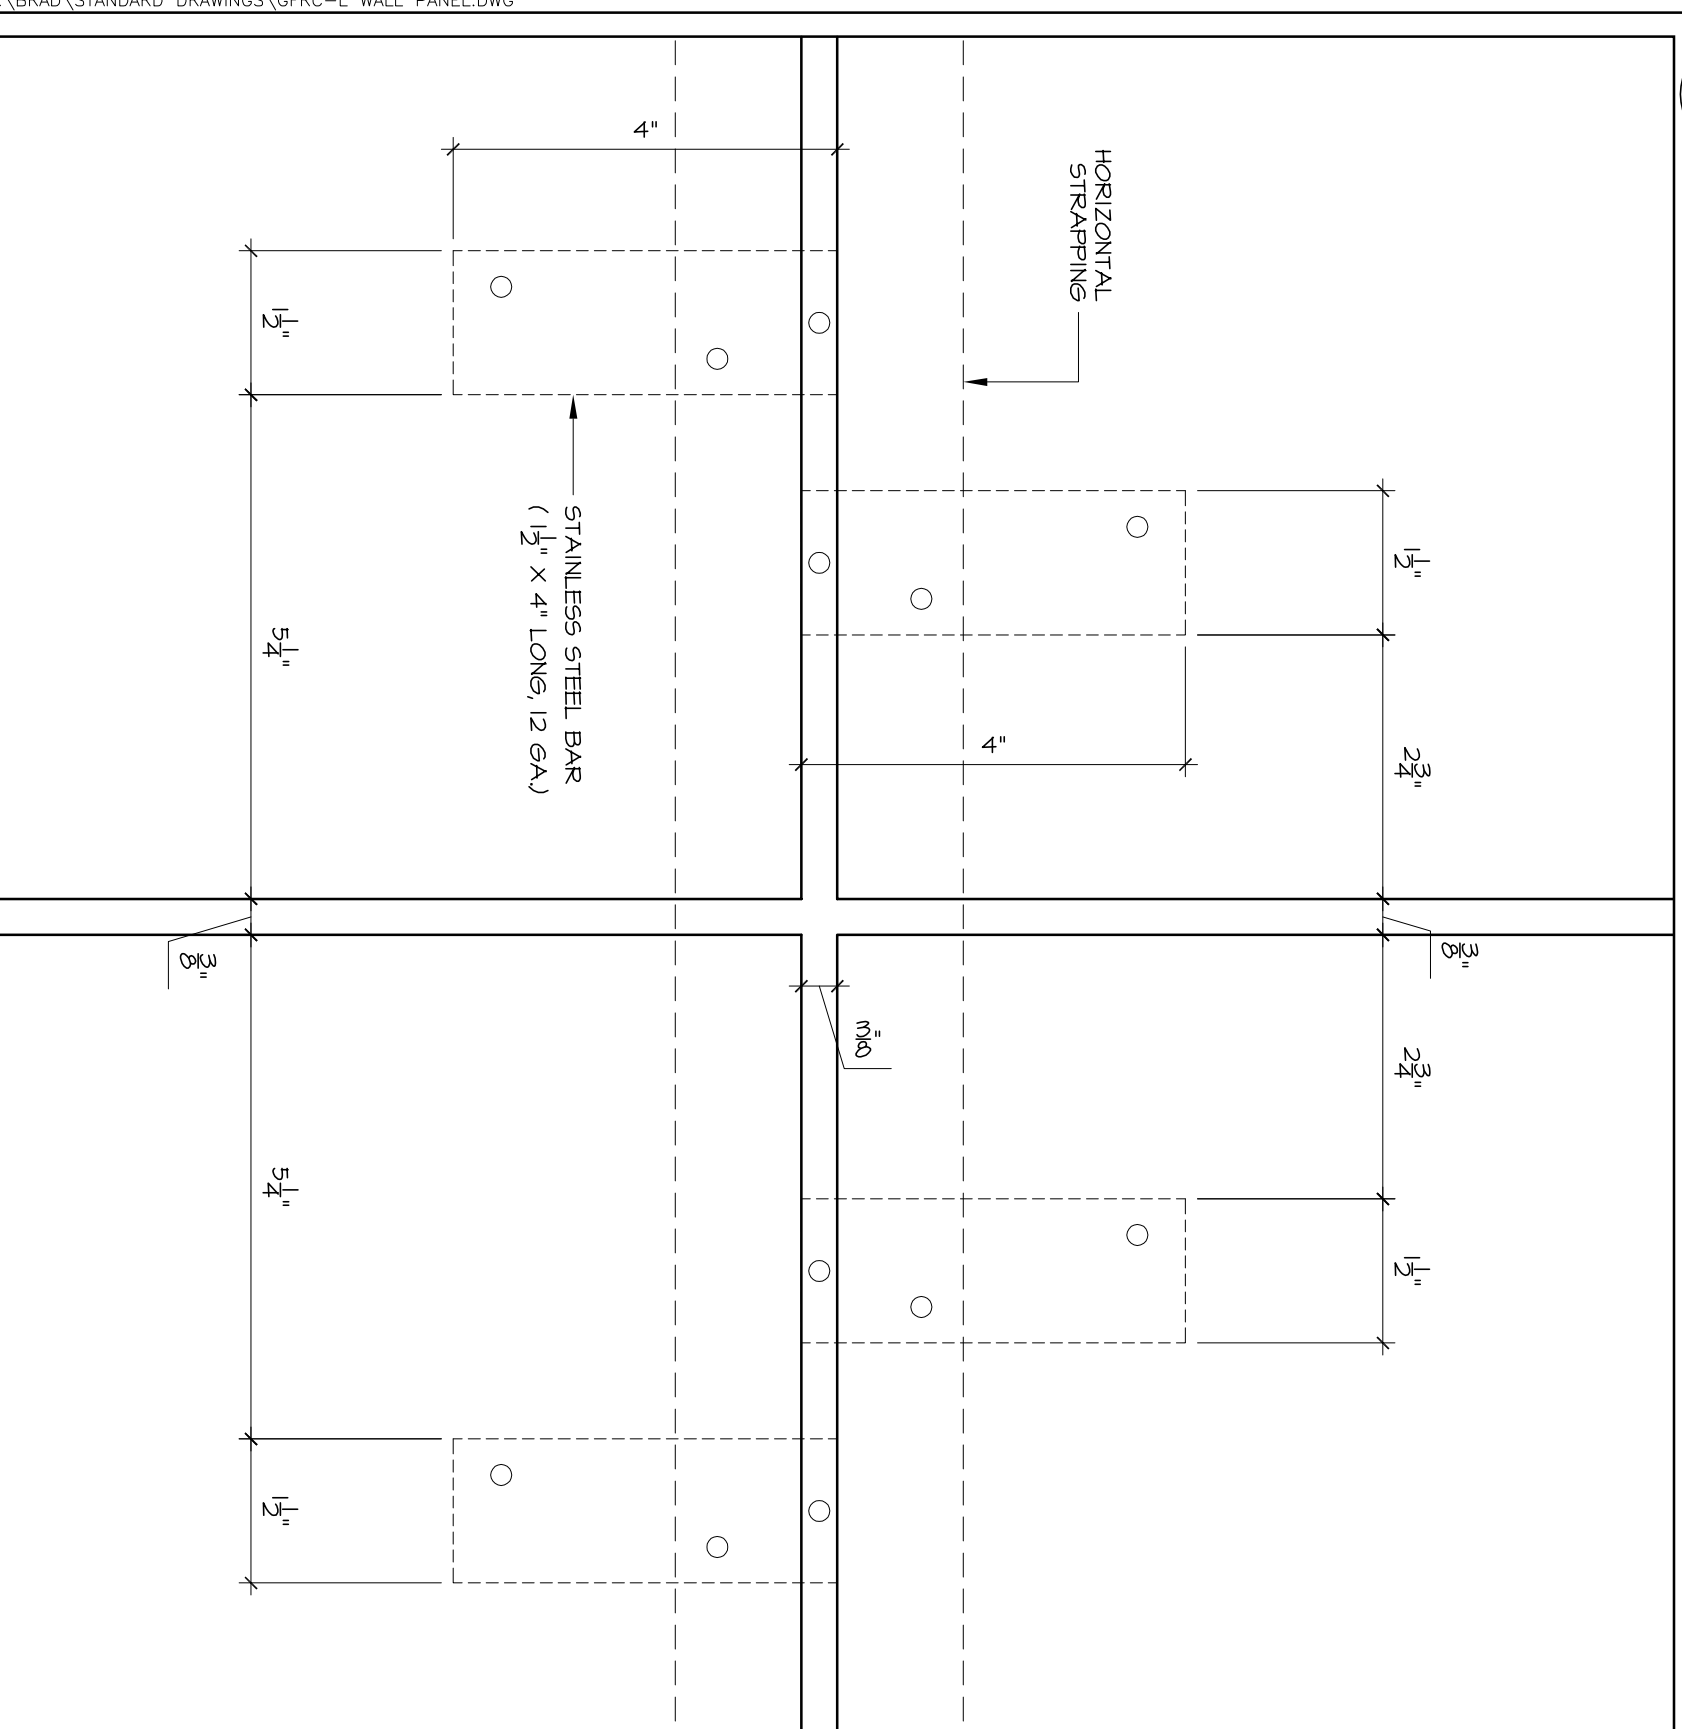

2 ELEVATION DETAIL
 SCALE: 3/4\"/>

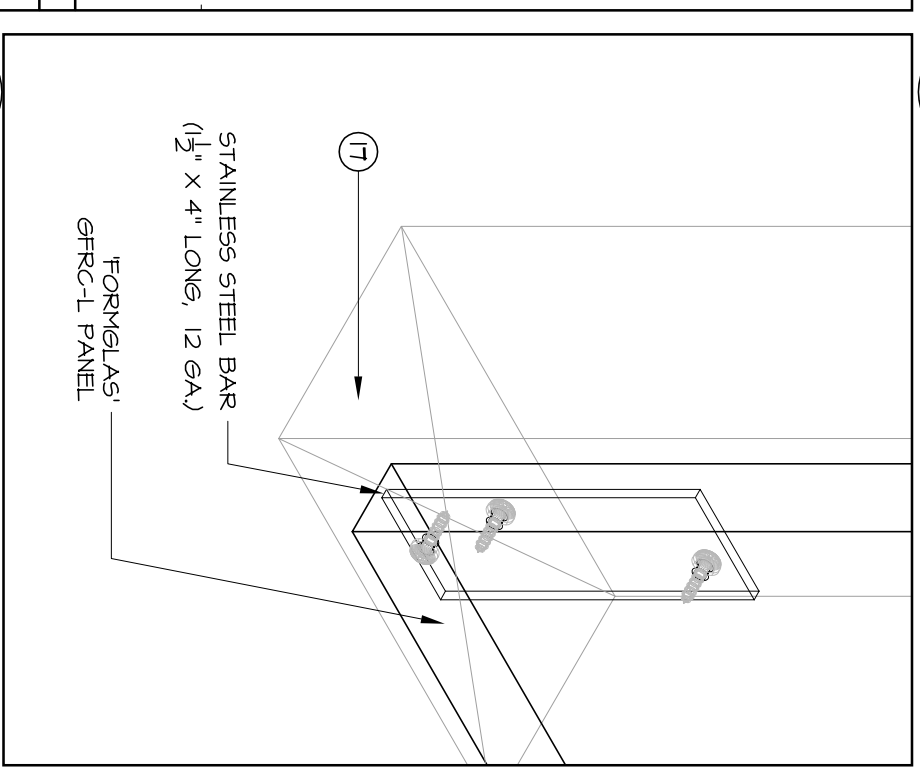

4 3D VIEW
 SCALE: HALF SCALE
 REF.

STANDARD LEGEND
 GFRCL (CL)

- 1 FINANCES
- 2 N/A
- 3 JOINT [N]
- 4 [N]
- 5 [N]
- 6 N/A
- 7 N/A
- 8 STEEL 1" OR 2" [NOT COM'S]
- 9 [N]
- 10 BUT-IN ROD BENE. [FILED AS REQ'D]
- 11 BUT-IN LOOP [WASER]
- 12 BUT-IN PLASTIC GUSSET
- 13 BEEL EDGES / CORNERS
- 14 FLASE JOINT
- 15 [REPAIR (REPAIRING AN)]
- 16 [REPAIR (REPAIRING AN)]
- 17 FRAMING, BLOOMING, ETC.
- 18 SHIMS
- 19 STAINLESS STEEL SCREWS [FILED AS REQ'D]
- 20 CALKED JOINT
- 21 ADHESIVE
- 22 [N]
- 23 [N]
- 24 [N]

MISCELLANEOUS CERTIFICATION
 FORMULAS IS REGISTERED AS AN
 INSTALLATION SEQUENCE ISO 9001-2000 COMPANY
 * APOSTROPHES DENOTES SITE
 * ALL BUT-IN STEEL IS GALVANIZED

GFRCL (CL) NOTES

- 1. INSTALLATION
 - FASTENING, SUSPENSION AND BRACING METHODS INDICATED ARE TO BE USED UNLESS OTHERWISE SPECIFIED.
 - REFER TO LOCAL CODES, VENDOR'S INSTRUCTIONS AND LOCAL INSULATION PROCEDURES ACCORDINGLY.
 - SOME SITE CUTTING AND/OR GRINDING OF PARTS MAY BE REQUIRED.
 - **AND FACE FINISHES WHERE POSSIBLE**
 - USE SPEC. ADHESIVE WHENEVER POSSIBLE.
 - **2. COMPENSATION FOR TOLERANCES**
 - USE GFRCL (CL) MATCHING GROUT SPACERS. SURFACE THE GROUT WITH THE GFRCL (CL) SURFACE BEYOND THE SPACER APPEARANCE.
 - ALWAYS USE STAINLESS STEEL SCREWS WITH FASTENING.
- 2. JOINTS
 - REFER TO TYP. JOINTS SPECIFICATIONS.
 - ALL JOINTS SHOULD BE MIN. 3" (4 mm) WIDE AND CALKED.
 - COLORING
 - COLOR SHADING VARIATIONS WILL OCCUR BETWEEN PARTS. DO NOT TRY TO MATCH SHADINGS IN SPECIFIC AREAS. VARY VARIOUS PARTS IN RANDOM ORDER.
- 3. DRIFT ANCHORS AND RODS
 - DRIFT ANCHORS ARE REQUIRED FOR WELD RELEASE UNLESS SPECIFICALLY NOTED. REBAR, SPLICERS OR REINFORCING WILL BE DRILLED BETWEEN 5" (127 mm) AND 6" (152 mm) FROM THE FACE OF THE WALL UNLESS SPECIFICALLY NOTED.
- 4. TOLERANCES
- 5. SHELL THICKNESS
 - 1/2" (12.7 mm)
 - 3/4" (19.0 mm)
- 6. DIMENSIONAL LENGTH OR WIDTH
 - WARPING / BENDING OUT OF PLANE
 - FIELD FINISHING MAY BE REQUIRED
- 7. ITEMS REQUIRED
 - UNLESS SPECIFICALLY NOTED, HARDWARE: SCREWS, FASTENERS, ADHESIVE, ETC. SHALL BE AS SPECIFIED BY OTHERS.
 - SEE FORMULAS'S SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- 8. WORKS PROTECT WORK* WILL BE OBTAINED ONE MONTH AFTER ISSUANCE OF MATERIALS CONTRACTORY / OWNER MAY REQUIRE TO RETURN MATERIALS.
- 9. DRAWING APPROVAL CONSTITUTES APPROVAL OF ALL CONTENT.
- 10. STANDARD LEGEND, GENERAL NOTES, COLORS, FINISHES, TEXTURE AND DIMENSIONS. PRODUCTS TO BE APPROVED WITH MANUFACTURING RECEIPT OF MATERIAL APPROVAL OF SHOP DRAWINGS AND CUSTOM COLOR/TEXTURE SAMPLES.

ISSUED FOR APPROVAL DATE

Formulas
 Products Ltd.
 2 CHAMPAIGNE DRIVE, TORONTO, ONT. M3J-2C9 CANADA
 TEL: (416) 633-8030 FAX: (416) 633-6988
 238 FORTIETH ST. SUITE 150 AMERIDOLE, PA 15003 USA
 TEL: (724) 286-4220 FAX: (724) 286-7174
 AVE. RUBENIA 88, PARQUE INDUSTRIAL PAQUA, MEXICALI, B.C.
 TEL: (986) 352-7609 FAX: (986) 352-7815
 E-MAIL: ENG@FORMULAS.COM

DATE:	SCALE: AS SHOWN
DRAWN:	CHECKED:
DRWG:	